




INSTALLATION GUIDE: GAUGE POD REPLACING DASHBOARD SPEAKER




- 1 Gently pry off the (centre channel) speaker grille assembly. Lift from the centre front section.

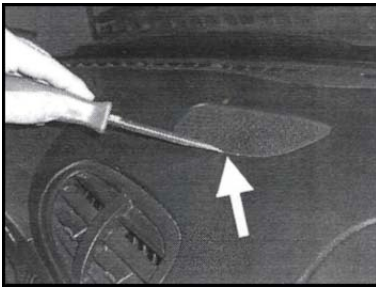

- 2 Remove speaker.

Route all lines for gauges (i.e. wires and/or tubing).
Note: Leave slack for ease of pod installation.

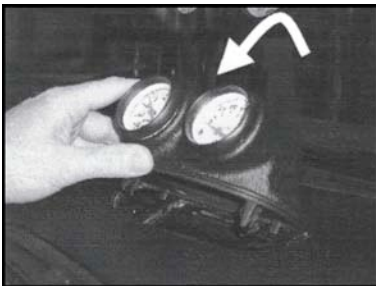

- 3 Insert gauges into pod and make appropriate connections. Align rear tabs with the hole and rotate until in place.

Note: Do not force gauges into opening, lightly sand opening if required.



- 4 Pod shown snapped into final position.